

PROPOSE RAISED TABLE

PROPOSED SPEED CUSHIONS

EXISTING 1.5m WIDE REDIWELD PEDESTRIAN REFUGE OR SIMILAR APPROVED, INCLUDING THE INSTALLATION OF 'KEEP LEFT' SIGN (TSRGD 610) ON FLECTA BOARD BOLLARD ON EACH SEGMENT

TRAFFIC SIGN & CARRIAGEWAY MARKING SCHEDULE				
TSRGD 2016 REFERENCE	DIAGRAM NUMBER	DESCRIPTION	NUMBER	LENGTH (m)
Schedule 9, Part 2, Item 2	602	Vehicular traffic must comply (give way) with the requirements specified in paragraph 3 or 4 of Part 7	1	
Schedule 9, Part 6, Item 3	1003A	Vehicular traffic must give way in accordance with the requirements in paragraph 7 of Part 7		5.2
Schedule 11, Part 4, Item 2	1004	Vehicle should not cross or straddle the longitudinal line width 150mm		28.6
Schedule 11, Part 4, Item 8	1009A	Edge of the carriageway at a road junction, exit from a private drive onto a public road, or the start of a cycle lane (Longitudinal marking)		5.4
Schedule 7, Part 4, Item 1	1018.1	(a) Waiting of vehicles prohibited at all times or (b) stopping of vehicles in a lay-by prohibited except in emergency		30
Schedule 9, Part 6, Item 4	1023A	Approach to a road junction, level crossing or road narrowing at or near which is placed the marking in item 3 or 6	1	
Schedule 11, Part 4, Item 23	1040	Part of the carriageway which vehicular traffic should not enter unless it is seen by the driver to be safe to do so (Alternative types)		57
Schedule 11, Part 4, Item 33	1062	Road hump	10	
Schedule 10, Part 4, Item 9	1065	Road marking indicating the maximum speed limit (20 mph)	7	

© CROWN COPYRIGHT AND DATABASE RIGHT YEAR. ORDNANCE SURVEY 100019338. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.

- KEYS:**
- PROVIDE NEW RAISED TABLE. CONSTRUCTED IN 40mm THICK SMA10 SURFACE COURSE AND UP TO 75mm THICK AC20 DENSE BIN 40/60 REC. ON TOP DBM REGULATING LAYER. COMPACT EXISTING SUB-BASE AND APPLY TACK COAT. TOTAL AREA 47m<sup>2</sup> (FOR DETAILS SEE TO DRG No. C-19-TC-SD-001).
  - PROVIDE AND LAY NEW 'BUFF' COLOURED TACTILE PAVING AND 30mm MORTAR BEDDING. UP TO 100MM THICK TYPE 1 BASE (IF REQUIRED LBL ENGINEER MUST BE CONSULTED). COMPACT EXISTING SUB-BASE. TOTAL AREA = 3.84m<sup>2</sup> REFER TO DRG. NO. 110469-1100-SD-03)
  - PROVIDE AND LAY NEW 400 X 400 X 65 MODULAR PAVING SLABS ON 30mm 3:1 SAND CEMENT BEDDING. UP TO 100MM THICK TYPE 1 BASE (IF REQUIRED LBL ENGINEER MUST BE CONSULTED). COMPACT EXISTING SUB-BASE. REFER TO DRG. NO. C21-LCR-STD-001. TOTAL AREA = 46.16m<sup>2</sup>
  - PROVIDE AND LAY NEW 150 X 300mm GRANITE KERB ON 150mm THICK ST4 BED AND BACKING. REFER TO DRG. C21-LCR-STD-001 FOR CONSTRUCTION DETAIL. TOTAL LENGTH = 17.7m
  - PROVIDE AND LAY NEW 150 X 150mm GRANITE DROPPED KERB, LAID ON 150MM THICK ST4 BED AND BACKING. REFER TO DRG. C21-LCR-STD-001 FOR CONSTRUCTION DETAIL. TOTAL LENGTH = 4.8m
  - PROVIDE AND LAY 150 X 300MM GRANITE DROPPER KERB, LAID ON 150mm THICK ST4 BED AND BACKING. REFER TO DRG. C21-LCR-STD-001. TOTAL LENGTH = 3.6m
  - INSTALL NEW GULLY POT WITH D400 GULLY GRATING AND FRAME CONNECTED TO EXISTING DRAINAGE SYSTEM (DETAIL SEE DRG No. 110469-500-SD-01)
  - EXISTING GULLY
  - PROPOSED LINEAR DRAINAGE - SYSTEM TO BE AGREED


REV	DESCRIPTION	DRAWN	SIG	DATE	CHKD	SIG	DATE	APP	SIG	DATE

CAPITAL STUDIO,  
INFRASTRUCTURE & DELIVERY,  
3RD FLOOR, CIVIC CENTRE  
& BRIXTON HILL  
LONDON, SW2 1EG  
020 7926 9000

DRAWN	PROJECT
SD	LEIGHAM COURT ROAD 20MPH SCHEME
CHKD	DRAWING TITLE
RPM	GENERAL ARRANGEMENT SHEET 1
APP	CLASSIFICATION
RPM	CONSTRUCTION
DATE	DRAWING NO
02.11.21	C21-LCR-GA-001
	REVISION
	REV



**'EXISTING' PELICAN CROSSING CARRIAGEWAY MARKING TO RELAYED**  
For detail see drg no. 110469-700-SD-01

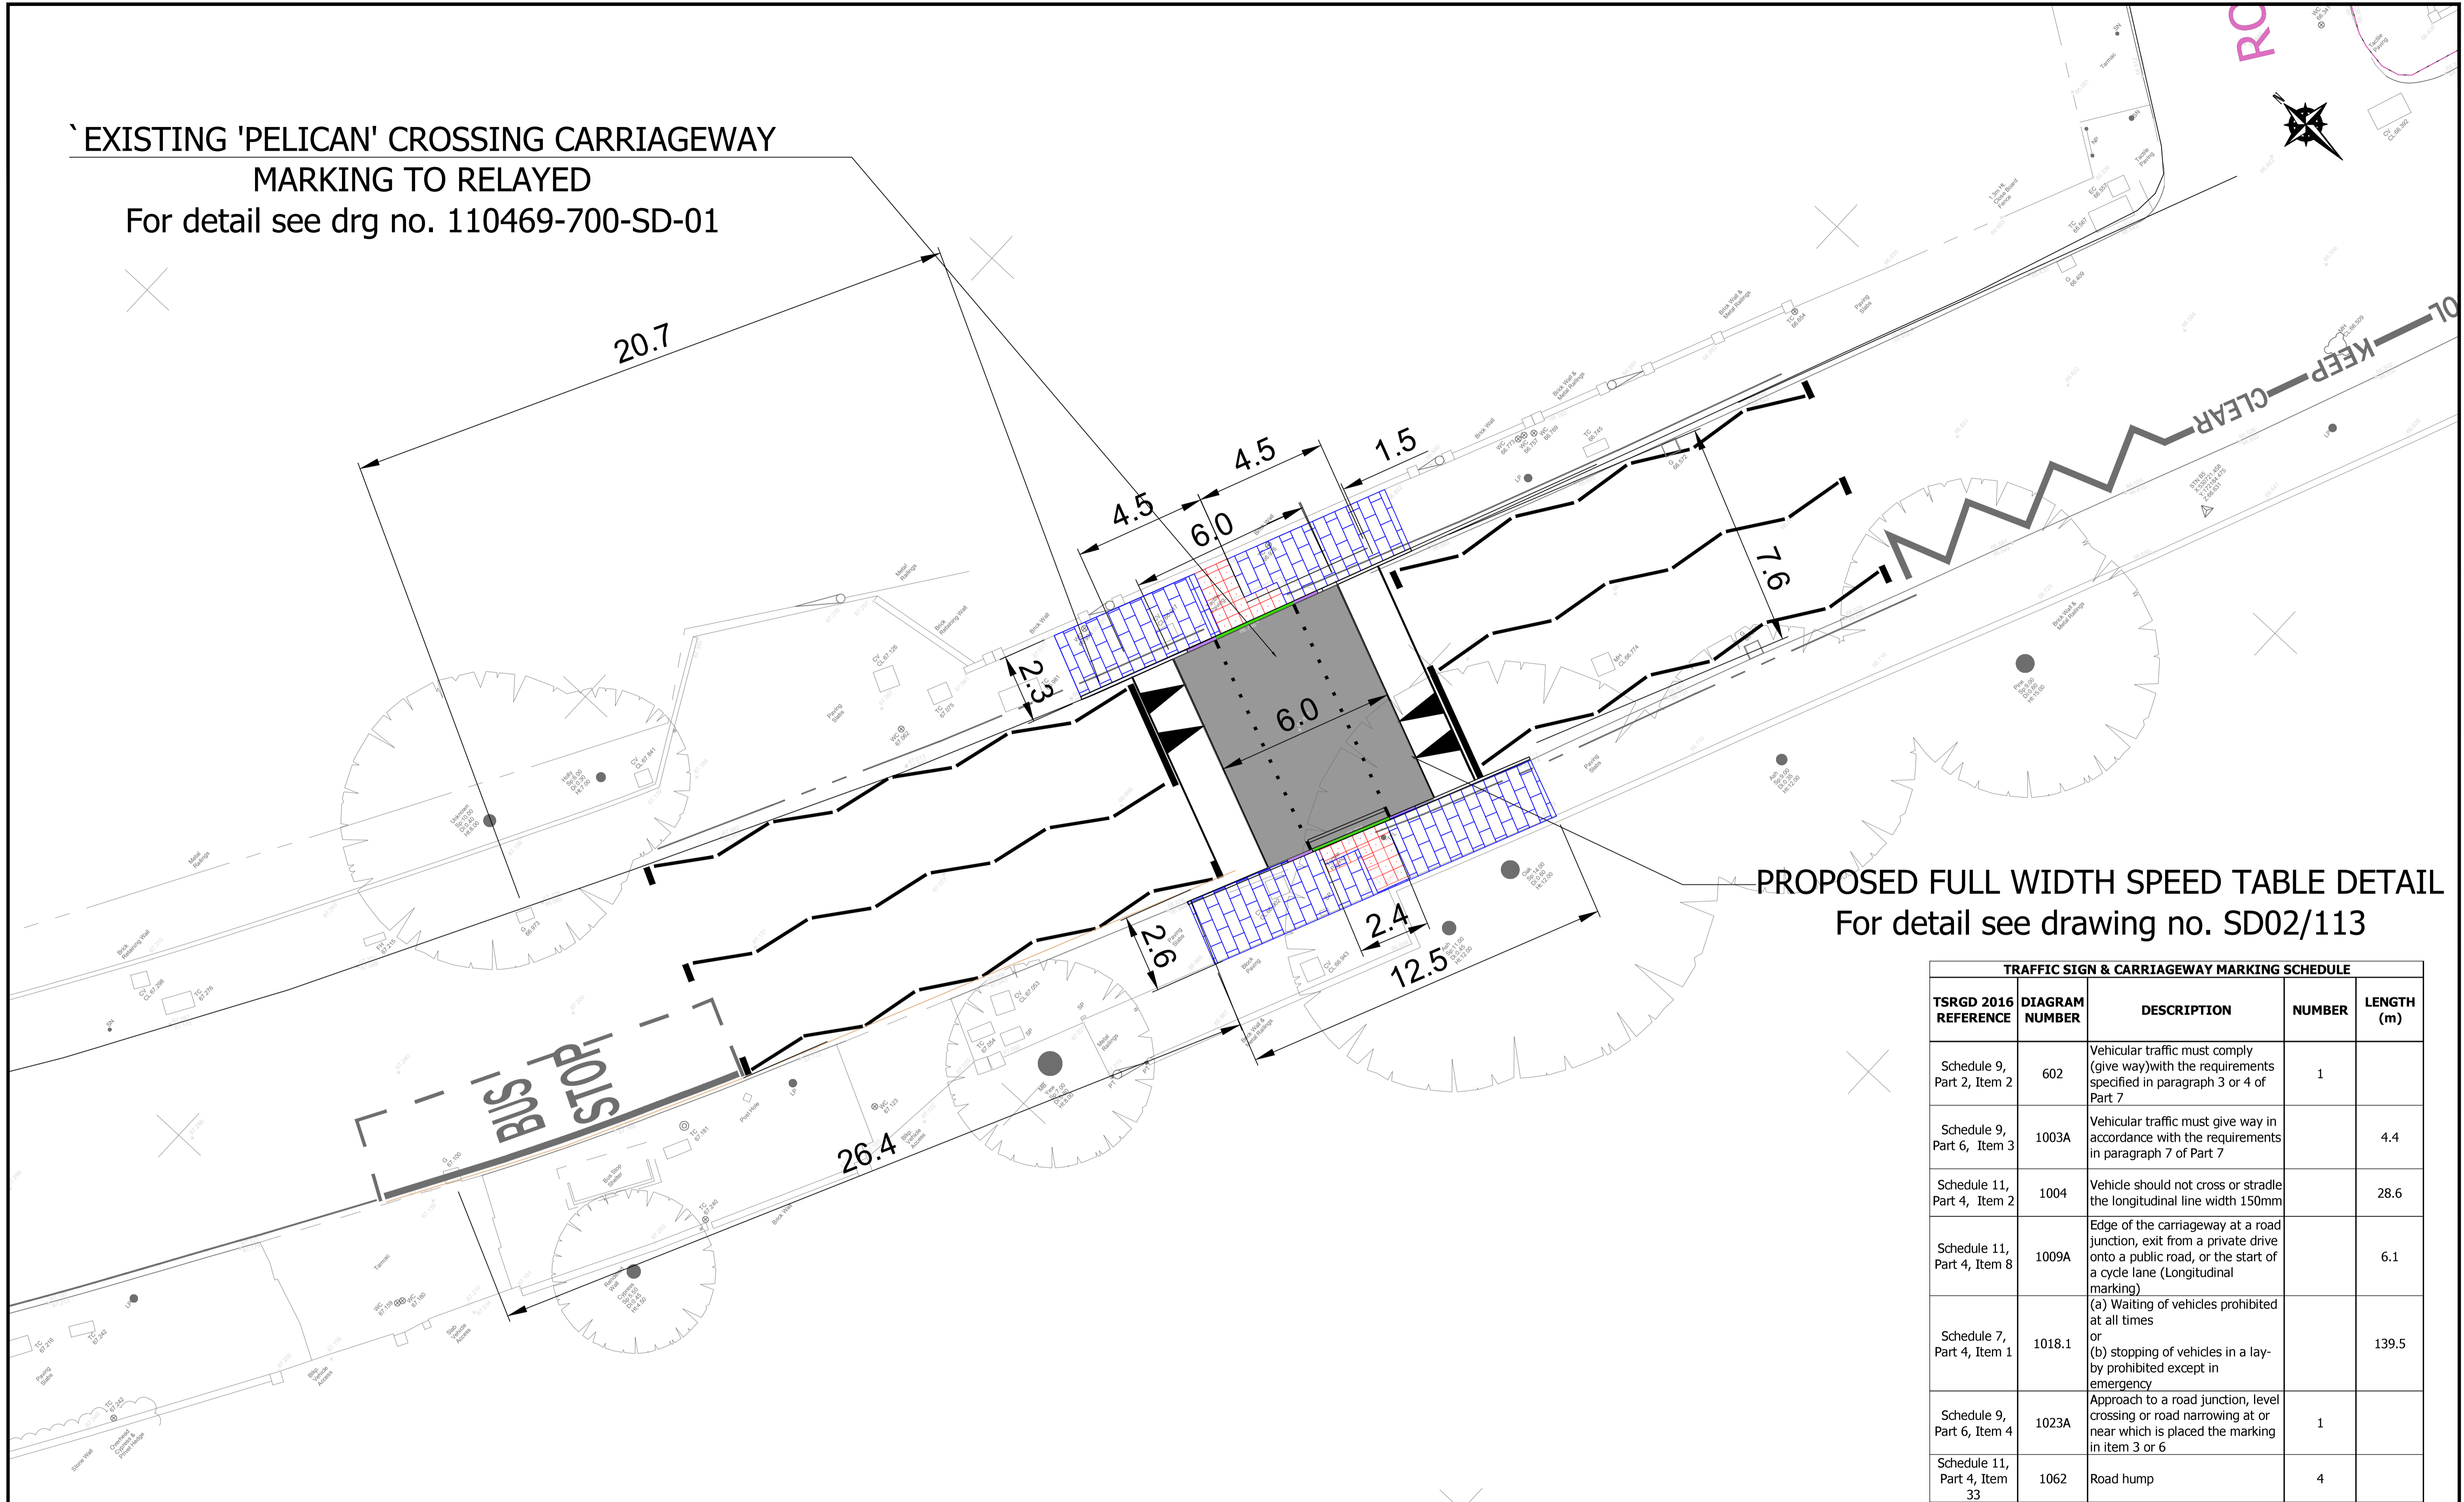

**PROPOSED FULL WIDTH SPEED TABLE DETAIL**  
For detail see drawing no. SD02/113

TRAFFIC SIGN & CARRIAGEWAY MARKING SCHEDULE				
TSRGD 2016 REFERENCE	DIAGRAM NUMBER	DESCRIPTION	NUMBER	LENGTH (m)
Schedule 9, Part 2, Item 2	602	Vehicular traffic must comply (give way) with the requirements specified in paragraph 3 or 4 of Part 7	1	
Schedule 9, Part 6, Item 3	1003A	Vehicular traffic must give way in accordance with the requirements in paragraph 7 of Part 7		4.4
Schedule 11, Part 4, Item 2	1004	Vehicle should not cross or straddle the longitudinal line width 150mm		28.6
Schedule 11, Part 4, Item 8	1009A	Edge of the carriageway at a road junction, exit from a private drive onto a public road, or the start of a cycle lane (Longitudinal marking)		6.1
Schedule 7, Part 4, Item 1	1018.1	(a) Waiting of vehicles prohibited at all times or (b) stopping of vehicles in a lay-by prohibited except in emergency		139.5
Schedule 9, Part 6, Item 4	1023A	Approach to a road junction, level crossing or road narrowing at or near which is placed the marking in item 3 or 6	1	
Schedule 11, Part 4, Item 33	1062	Road hump	4	
Schedule 10, Part 4, Item 9	1065	Road marking indicating the maximum speed limit (20 mph)	2	

© CROWN COPYRIGHT AND DATABASE RIGHT YEAR. ORDNANCE SURVEY 100019338. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.

- KEY:**
- NEW RAISED TABLE. CONSTRUCTED IN 40mm THICK SMA10 SURFACE COURSE AND UP TO 75mm THICK AC20 DENSE BIN 40/60 REC. ON TOP DBM REGULATING LAYER. COMPACT EXISTING SUB BASE AND APPLY TACK COAT. TOTAL AREA 44.5m<sup>2</sup> (FOR DETAILS SEE TO DWG No. C-19-TC-SD-001).
  - PROVIDE AND LAY NEW 150 x 300mm GRANITE KERB ON 150mm THICK ST4 BED AND BACKING. REFER TO DRG. C21-LCR-STD-001 FOR CONSTRUCTION DETAIL TOTAL LENGTH = 15.1m
  - PROVIDE AND LAY NEW 150 x 150mm GRANITE DROPPED KERB, LAID ON 150mm THICK ST4 BED AND BACKING. REFER TO DRG. C21-LCR-STD-001 FOR CONSTRUCTION DETAIL TOTAL LENGTH = 5.6m
  - PROVIDE AND LAY NEW 400 x 605 MODULAR PAVING SLABS ON 30mm 3:1 SAND CEMENT BEDDING, UP TO 100mm THICK TYPE 1 BASE (IF REQUIRED LBL ENGINEER MUST BE CONSULTED). COMPACT EXISTING SUB-BASE. TOTAL AREA = 7.7m<sup>2</sup> (REFER TO DRG. NO. 110469-1100-SD-03)
  - PROVIDE AND LAY NEW 150 x 300mm GRANITE DROPPER KERB, LAID ON 150mm THICK ST4 BED AND BACKING. REFER TO DRG. C21-LCR-STD-001 TOTAL LENGTH = 3.6m
  - INSTALL NEW GULLY POT WITH D400 GULLY GRATING AND FRAME CONNECTED TO EXISTING DRAINAGE SYSTEM (DETAIL SEE DRG NO. 110469-500-SD-01)
  - EXISTING GULLY
  - PROVIDE NEW 1.5m WIDE RAMP. CONSTRUCTED IN 40mm THICK SMA10 SURFACE COURSE AND UP TO 75mm THICK AC20 DENSE BIN 40/60 REC. ON TOP OF DBM REGULATING LAYER. COMPACT EXISTING SUB BASE AND APPLY TACK COAT. REFER TO DRG. C-19-TC-SD-001 TOTAL AREA 22.3m<sup>2</sup>.

REV	DESCRIPTION	DRAWN	SIG	DATE	CHKD	SIG	DATE	APP	SIG	DATE

CAPITAL STUDIO, INFRASTRUCTURE & DELIVERY, 3RD FLOOR, CIVIC CENTRE & BRICKEN HILL, LONDON, SW2 1EG 020 7926 9000

DRAWN	SD	PROJECT	LEIGHAM_COURT_ROAD_20MPH_SCHEME
CHKD	RPM	DRAWING TITLE	GENERAL_ARRANGEMENT_SHEET_2
APP	RPM	CLASSIFICATION	CONSTRUCTION
DATE	02.11.21	PAPER	A1
		SCALE	1:100
		DRAWING NO	C21-LCR-GA-002
		REVISION	REV